

High-speed communication line CDN for lightning surge CDN 405T8



As per

- > IEC 61000-4-5
- > EN 61000-4-5
- > GB/T 17626.5

Description

CDN 405T8 coupling/decoupling network is to test the capacity of high speed communication line for surge test. Data transmission rate is up to 1,000MBit/s. It is designed to meet the requirements of figure 14 in IEC/EN 61000-4-5: 2005. The material of decoupling device is high conductive magnetic material. Stable decoupling capacity and transmission rate, easy to use and compact size.

Features

- > High conductive magnetic material for decoupling device
- > Test output to 4-path 8-line
- > Data rate up to 10MB/100MB/1000MB
- > Superimposing surge waveforms
- > High capacity of surge resistance, standard withstand voltage up to 6KV, 10KV withstand voltage need to be customized.
- > Replaceable current-limiting resistors


Industries

- > Communication
- > Telecom
- > Medical
- > Broadcast
- > Railway
- > IT
- > Military
- > Avionics
- > New energy

Technical parameters	
Model	CDN 405T8
Standard	IEC/EN 61000-4-5
Coupling waveform	1.2/50us, 10/700us
Coupled current waveform	8/20us、5/320us
Pulse voltage	6kV (10 kV need to be customized)
Coupling mode	Common mode (line to ground)
Coupling device	90V gas discharge tube
Communication connector	RJ45 female connector to connect communication line
Pin assignment	Pair 1: pins 1 / 2 Pair 2: pins 3 / 4 Pair 3: pins 5 / 6 Pair 4: pins 7 / 8
Data rate	10MBit/s, 100MBit/s, 1,000MBit/s
Working voltage	DC 3-12V
Working current	Max 1A
Residual voltage	<15% (coupling surge voltage)
Decoupling inductor	20mH

Optional accessories		
SZR100	100ohm (as per10/700us,5/320us)	
SZR160	160ohm (as per1.2/50us,8/20us)	
SZR200	200ohm (as per10/700us,5/320us)	
Accessories		
HV cable surge	1m HV silicone line with banana plug	2
Earth cable	0.3m yellow green	1
Internet cable	1m cat 6	2
SZR200	Current-limiting module	8
Document	Factory test certificate	1
	User manual	1
General Data		
Weight	3.6kg	
Dimension	L×W×H 250×200×133cm	
Enclosure	Aluminum	
Temperature	5℃ - 35℃ (operation condition)	
Humidity	45% - 75% (operation condition)	
Package	carrying case	

Test connection schematic:

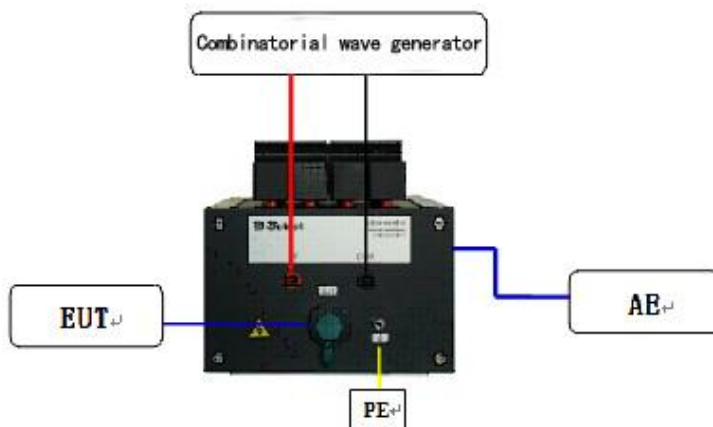



SUZHOU 3CTEST ELECTRONIC CO., LTD

Headquarter

Unit 2, Anda Industrial park, Jinshan Rd, SND, Suzhou,
 215011, China
 Tel: +86-512-68413700/3800/3900
 Fax: +86-512-68079795
 http://www.3ctest.cn
 Email: info@3ctest.cn

BEIJING OFFICE

Room D 206, D block, Keshi Building, No.28, Shangdixinx
 Road, Haidian District, Beijing, China
 Tel: +86-010-82899984/82899948
 Fax: +86-010-82899943

CHENGDU OFFICE

Room 1501, Unit 3, Ideal Centre, No.38 Tianyi Street, SND,
 6100085, Chengdu, China
 Tel: +86-028-85327800
 Fax: +86-028-85311400

SHENZHEN OFFICE

Room 805, Huawen Building, Xili Chaguang Road, Nanshan
 District, Shenzhen, China.
 Tel: +86-755-86626625/86344313
 Fax: +86-755-26966255

Xi'an Office

Add.: Room 2204, Visa Yinghai Building, Green land Central
 Plaza, Jinye Road, Crossig of Zhangbasan Road, High-tech
 district, Xi'an city, China.
 Tel: +86-029-68985077/68985700
 Fax: +86-029-68717677



TAIWAN OFFICE

RICHTEC INSTRUMENTS CO., LTD
 6F-5, No.130, Ln.235, Baoqiao Rd, Xindian District, New
 Taipei City, 23145, Taiwan
 Tel: +886-2-89121185 Fax: +886-2-89121812
 Email: rich.tec@msa.hinet.net
 http://www.richtec.com.tw



TESTEK Co.,LTD

Address: 601Ho, SungwoonKoa, 141 Hyeonam-ro,
 Suji-Gu, Yongin-Si, Gyeonggi-Do, 448-808
 Tel: 070-4099-2072/H.P : 010-6500-6648
 Email: woo@testek.co.kr
 http://www.testek.co.kr, www.3ctest.co.kr



Quantel Pte Ltd

Address: 46 Lorong 17 Geylang #05-02
 Enterprise Industrial Building
 Singapore 388568
 Tel: +65 6745 3200
 Email: info@quantel-global.com
 https://www.quantel-global.com



European Agency

Europe: AR Europe
 Yvonne McGlinchey
 ymcglinchey@ARWorld.US
 +353 61 504300
 Address: First Floor Ashling Building, National Technology
 Park, Limerick, Ireland